



## TRANSFO-CV-96W-24V-4000mA-BK-DK


Class 2



PHOTOS/ SCHEMA



### MECHANICAL DIMENSIONS

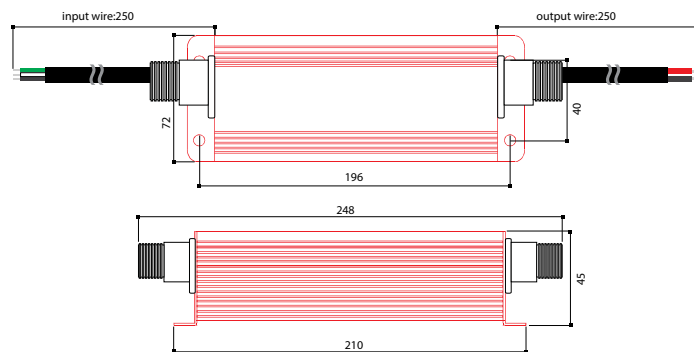

UNIT:MM

Full range of power unit current and constant voltage that will meet all your needs for assembly and installation. Our superior products are recognized worldwide for its reliability and stability.

### CHARACTERISTICS

- Ideal for indoor and outdoor LED lighting fixtures
- Protections: Short circuit, Over load & Over voltage
- 2 years warranty

SPECIFICATIONS

MODEL		TRANSFO-CV-96W-24V-4000mA-BK-DK
INPUT	INPUT VOLTAGE VAC	90 to 130VAC
	RATED VOLTAGE VAC	120VAC
	OPERATING FREQUENCY	50 / 60 Hz
	INPUT POWER	≤ 122W
OUTPUT	RATED OUTPUT CURRENT	0 à 4.2A VDC
	RATED OUTPUT VOLTAGE	23.5 to 24.5VDC
	SHORT CIRCUIT PROTECTION	Connection failure for 3 second, after power-on, PSU can work normally.
	PROTECTION	Overload ,over voltage, short circuit.
ISOLATION	INPUT-OUTPUT	1. Testing voltage 500VDC, the impedance is more than 100M. 2. With relative humidity 91 to 95%, putting the PSU in the ambient temperature 20 to 30°C for 48 hours, the impedance is more than 50M.
	INPUT-HOUSING	3. Grounded, connected 1500VAC current 5mA, power-on for 1 minute. 4. Not grounded, connected 3750VAC current 5mA, power-on for 1 minute.
	SELV	Pass
RIPPLE		≤ 500mVp-p
EARTH VOLTAGE		≤ 10VAC
IP RATING		IP67
WORKING TEMPERATURE		-25 °C to 40 °C
STORAGE TEMPERATURE		-25 °C to 70 °C

PROJECT / PROJET:

# PO:

CLIENT:

DATE:

NOTES: